

❖ AT-030 MCL

3CCD Progressive Scan RGB Color

C3 Camera Suite
 Unlimited
 Digital
 Switchability



- 3 x 1/3" CCD progressive scan RGB color camera for vision applications
- 659(h) x 494 (v) active pixels for each CCD (7.4 μm square)
- Compact RGB prism for C-mount lenses
- Chromatic shading reduction permits wider choice of lenses
- 120.5 frames per second with full resolution
- Pre-set or variable partial scan available for faster frame rates
- Vertical binning for higher sensitivity and frame rate
- 24-bit RGB output via single port Camera Link base configuration
- 30-bit or 36-bit output via dual port Camera Link medium configuration
- Linear matrix circuit with manual control or sRGB or Adobe RGB pre-sets
- Knee function available for knee-point and knee-slope settings
- Edge pre-select, pulse width control, fast PWC, and reset continuous trigger modes
- Pre-set shutter from OFF (1/120) to 1/130,000 in 10 steps
- Individually programmable shutter/exposure for R, G, and B
- Manual, continuous, one-push auto, or pre-set white balance
- Setup by Windows XP/Vista/7 software via RS 232C



Specifications for AT-030 MCL


Specifications	AT-030 MCL
Sensor	3 x 1/3" progressive scan CCD - ICX424AL
Pixel Clock	58 MHz
Frame rate full frame	120.49 frames/second (511 lines per frame)
Active area	4.88 (h) x 3.66 (v) mm
Cell size	7.4 (h) x 7.4 (v) μm
Active pixels	659 (h) x 494 (v)
Read-out modes	Full 659 (h) x 494 (v) 120.49 fps 2/3 partial scan 659 (h) x 328 (v) 169.62 fps 1/2 partial scan 659 (h) x 246 (v) 208.72 fps 1/4 partial scan 659 (h) x 122 (v) 322.36 fps 1/8 partial scan 659 (h) x 60 (v) 422.96 fps Variable partial Programmable start line (1-493) & height (2-494) Vertical binning 659 (h) x 247 (v) 193.88 fps
Sensitivity (on sensor)	0.34 Lux, max gain, 50% video
S/N ratio	>50 dB. (Green ch., 0 dB gain)
Video output	3 x 8 bit RGB: single port Camera Link base 3 x 10 bit RGB: dual port Camera Link medium 3 x 12 bit RGB: dual port Camera Link medium
Auto-iris lens video	0.7 V p-p, 75 Ω NUM luminance signal w/o sync
Gain, manual	Manual for all 3 colors Master -3 to +21 dB R and B -7 to +10 dB
Synchronization	Int. X-tal
Inputs Camera Link	Ext. trigger, (LVDS)
TTL	Ext. trigger 4 Vpp ±2 V. (TTL or 75 Ω)
Outputs Camera Link	RGB 8/10/12 bit video output. Do - D9
TTL	Pixel clock, DVAL, LVAL, FVAL and EEN (LVDS) XEEN output 4 Vpp from 75 Ω source (TTL)
Trigger modes	Continuous, Edge Pre-Select, Pulse Width Control, Fast PWC, Reset Continuous
Electronic shutter Pre-set shutter	1/120 (off) to 1/130,000 sec. in 10 steps. All or R, G, B individually
Programmable exposure	1L - 511L in 1L (16.2 μs) steps. All or R, G, B individually
Pulse Width Control	2L (32.4 μs) to 122,640L (2 sec.)
White balance	Manual/one-push, continuous, Preset(4000K, 4600K, 5600K) Note: 7800K is Factory default setting
Tracking range	-6 to +6 dB. (4000K to 9000K)
Gamma	1.0 (OFF), 0.6, 0.45 or LUT (Look Up Table)
Knee function	Knee point and knee slope for R, G, and B channel
Linear Matrix	Manual for R, G and B / Preset (sRGB, Adobe RGB)
Blemish Compensation	ON (use factory preset data) or OFF
Control interface	EIA-644 LVDS
Operating Temperature	-5° C to +45° C
Humidity (operation)	20 - 80% non-condensing
Storage temp./humidity	-25° C to 60° C / 20% - 80 % non-condensing
Vibration	3G (15 Hz to 200 Hz XYZ)
Shock	50 G
Regulations	CE (EN 61000-6-2, EN 61000-6-3), FCC part 15 class A, RoHS
Power	12V to 24V DC ± 10%. 6W typical (full frame @ 12V)
Lens mount	C-mount (Max 4.0 mm thread)
Dimensions (H x W x L)	55 mm x 55 mm x 78.3 mm
Weight	290 g

Ordering Information

AT-030MCL 1/3" 3CCD Progressive Scan RGB Color Camera

Connector pin-out

DC In / Trigger



HIROSE HR10A-10R-12PB-01

Pin	Signal
1	Ground
2	+12V DC input
3	Ground
4	Iris video
5	Ground
6	—
7	—
8	Ground
9	XEEN out
10	Trigger in
11	—
12	Ground

Camera Link Interface

26 pin MCL connector HDR-EA26LFYPG1+




Pin	Signal	Function	
1	14	GND	
2	15	X0-/X0+	CL Data out
3	16	X1-/X1+	CL Data out
4	17	X2-/X2+	CL Data out
5	18	Xclk-/Xclk+	CL Clk
6	19	X3-/X3+	CL Data out
7	20	SerTC+/SerTC-	Serial in*
8	21	SerTFG-/SerTFG+	Serial out*
9	22	CC1-/CC1+	Trigger*
10	23	CC2+/CC2-	Reserved
11	24	CC3-/CC3+	Not used
12	25	CC4+/CC4-	Not used
13	26	GND	


* Via Camera Link or 12-pin Hirose Information shown is for Port 1. For Port 2, which is used when providing 30-bit or 36-bit output via Camera Link medium configuration, pinout is similar, except pins 7-12 and 20-25 are not used.

Dimensions


Front view




Side view




Bottom view



Rear view



Spectral Response

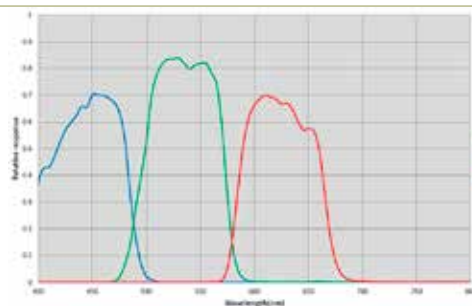

Combined prism and CCD response

Company and product names mentioned in this datasheet are trademarks or registered trademarks of their respective owners. JAI-A-S cannot be held responsible for any technical or typographical errors and reserves the right to make changes to products and documentation without prior notification.

Europe, Middle East & Africa
Phone +45 4457 8888
Fax +45 4491 3252

Asia Pacific
Phone +81 45 440 0154
Fax +81 45 440 0166

Americas
Phone (Toll-Free) 1 800 445 5444
Phone +1 408 383 0300



Visit our web site on www.jai.com

See the possibilities