

## ❖ AT-200 GE

3CCD Progressive Scan RGB Color

**C3** Camera Suite  
 Unlimited  
 Digital  
 Switchability



- 3 x 1/1.8" CCD progressive scan RGB color camera for vision applications
- 1624(h) x 1236 (v) effective pixels (4.40  $\mu\text{m}$  square) for each CCD
- Compact RGB prism for C-mount lenses
- Chromatic shading reduction permits wider choice of lenses
- 15.4 frames per second with full resolution
- Variable partial scan also available
- Vertical and horizontal binning for higher sensitivity and frame rate
- 24-bit or 30-bit RGB output via GigE Vision Streaming Protocol
- Linear matrix circuit with manual control or sRGB or Adobe RGB pre-sets
- Look-up Table with 1024 10-bit values
- Multiple trigger modes including timed, trigger width, trigger controlled, and sequential
- Programmable exposure from 1/15 to 1/19267 (51.9  $\mu\text{s}$ )
- Individually programmable shutter/exposure for R, G, and B
- Manual, continuous, and one-push auto white balance
- Programmable GPIO with opto-isolated inputs and outputs
- Comprehensive SDK and control tool for Windows XP/Vista/7

**GigE**™  
 VISION



# Specifications for AT-200 GE


Specifications	AT-200 GE
Sensor	3 x 1/1.8" progressive scan CCD - ICX274AL
Pixel Clock	37 MHz
Frame rate full frame	15.4 frames/second
Active area	7.15 (h) x 5.44 (v) mm
Cell size	4.40 (h) x 4.40 (v) $\mu$ m
Active pixels	1624 (h) x 1236 (v)
Read-out modes	Full 1624 (h) x 1236 (v) 15.45 fps Variable partial Programmable start line; height = 8 to 1236L Max. frame rate at 8 lines = 123.56 fps Vertical binning 1624 (h) x 618 (v) 27.68 fps Horizontal binning 812 (h) x 1236 (v) 15.45 fps
Sensitivity (on sensor)	0.62 Lux, max gain, 50% video
S/N ratio	>50 dB. (Green ch., 0 dB gain)
Video output	3 x 8 bit RGB: 24-bit output format 3 x 10 bit RGB: 32-bit output format
Auto-iris lens video	0.7 V p-p, 75 $\Omega$ NUM luminance signal w/o sync
Gain, manual	Manual for all 3 colors Analog Master 0 to +15 dB Analog R and B -6 to +6 dB Digital -3 dB to +3 dB
Gain, auto	0 to 15 dB
GPIO Module	Input/Output switch Counter function Timer function Event message Configurable 14-in/10-out switch 16-bit counter based on pixel clock 16-bit timer and delay counter - 1MHz Internal status can be output as event message
Hardware Trigger modes	Configurable per GenICam standard. Includes timed, trigger width (pulse width), start/stop signal, sequential timed, delayed readout
Electronic shutter	Programmable exposure 1L (51.88 $\mu$ s) - 1248L in 1L steps Timed exposure 69 $\mu$ s to 65535 $\mu$ s in 1 $\mu$ s steps Auto shutter 1/15 to 1/268s
White balance	Manual, one-push, continuous, Note: 7800K is Factory default setting
Range	-6 to +6 dB. (4000K to 9000K)
Gamma	1.0 (OFF), 0.45 or LUT (Look Up Table) LUT: 1024 points, 10-bit values
Knee function	Knee point and knee slope for R, G, and B channel
Linear Matrix	Manual for R,G and B / Preset (sRGB, Adobe RGB)
Control interface	Register based. GigE Vision/GenICam compliant
GigE Vision streaming control	Packet size, delayed (frame) readout, inter-packet delay Default packet size - 1476 bytes. Max - 16020 bytes
Operating Temperature	-5° C to +45° C
Humidity (operation)	20 - 80% non-condensing
Storage temp./humidity	-25° C to 60° C / 20% - 80% non-condensing
Vibration	3G (15 Hz to 200 Hz XYZ)
Shock	50 G
Regulations	CE (EN 61000-6-2, EN 61000-6-3), FCC part 15 class B, RoHS
Power	12V to 24V DC $\pm$ 10%. 8.04W typical (full frame @ 12V)
Lens mount	C-mount (Max 4.0 mm thread)
Dimensions (H x W x L)	55 mm x 55 mm x 98.3 mm
Weight	340 g

## Ordering Information

AT-200GE 1/1.8" 3CCD Progressive Scan RGB Color Camera

## Connector pin-out

### DC In / Trigger




HIROSE HR10A-10R-12PB-01

#### Connector Pin-out

Pin 1	GND
2	+12 V DC input
3	Opto in 2(-)* / GND
4	Opto in 2(+)* / Auto iris lens
5	Opto in 1(-)
6	Opto in 1(+)
7	Opto out 1(-)
8	Opto out 1(+)
9	Opto out 2(-)
10	Opto out 2(+)
11	+12V DC input
12	GND


\* Pins 3 and 4 can be configured by internal switch selection

### GPIO Pinout



Pin	I/O
1	I LVDS In 1-
2	I LVDS In 1+
3	I TTL In 1
4	O TTL Out 1
5	GND
6	NC
7	NC
8	O TTL Out 2
9	GND


### GigE Vision Interface RJ-45 with locking screws




Pin	I/O	Pin	I/O
1	TRD+(0)	5	TRD-(2)
2	TRD-(0)	6	TRD-(1)
3	TRD+(1)	7	TRD+(3)
4	TRD+(2)	8	TRD-(3)

## Dimensions


### Front view




### Side view




### Bottom view



### Rear view



## Spectral Response

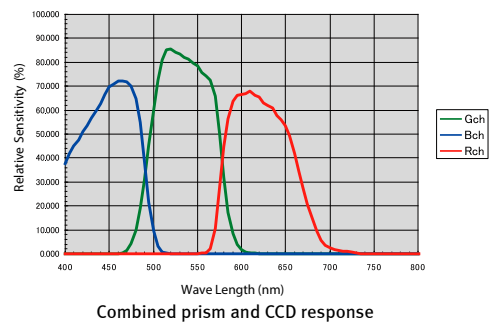

Europe, Middle East & Africa  
Phone +45 4457 8888  
Fax +45 4491 3252

Asia Pacific  
Phone +81 45 440 0154  
Fax +81 45 440 0166

Americas  
Phone (Toll-Free) 1 800 445 5444  
Phone +1 408 383 0300



See the possibilities

Visit our web site on [www.jai.com](http://www.jai.com)