

➤ **TM-6740GE/TMC-6740GE** Progressive Scan CCD



- *1/3" progressive scan IT CCD (Kodak KAI-0340)*
- *640(H) x 480(V) @ 200 fps*
- *7.4 μ m square pixels*
- *Compact 51 x 51 x 84 mm housing*
- *High speed point-to-point connection, up to 1Gbps*
- *Gigabit Ethernet output (8-bit/10-bit selectable)*
- *Partial scan & binning modes up to 3205 frames per second*
- *Maximum dynamic range control through built-in look-up table (8-bit only)*
- *Full-frame shutter to 1/64,000 sec.*
- *Asynchronous reset, no-delay shutter*
- *Built-in pattern generator*
- *Extensive software developer's kit (SDK)*
- *Monochrome or color*

GigE[™]
VISION

Specifications for TM-6740GE/TMC-6740GE

Specifications	TM-6740GE/TMC-6740GE
Sensor	1/3" progressive scan interline transfer CCD
Active area	4.74mm x 3.55mm
Active pixels	640 (H) x 480 (V)
Cell size	7.4 μm x 7.4 μm
Readout modes	A 640 (H) x 480 (V) @ 200 Hz B 640 (H) x 160 (V) @ 540 Hz (partial scan) C 224 (H) x 480 (V) @ 500 Hz (partial scan) D 224 (H) x 160 (V) @ 1250 Hz (partial scan)
Synchronization	Horizontal and vertical 2x and 4x binning independently selectable
Synchronization	Internal/External auto switch HD/VD, 4.0 Vp-p impedance 4.7K Ω VD= frame rates ± 2%, non-interlace HD=100 kHz ± 2%
Pixel clock	40.00 MHz
S/N ratio	>50 dB
Sensitivity	Mono 1.4 lux f=1.4 (no shutter) @ 200 fps, Color 11.0 lux f=1.4 (no shutter) @ 200 fps, Pixel sensitivity: 30 μV/e-
Video output	Gigabit Ethernet, Analog 714 mV 75 Ω
Color (RMC/TMC-6740 only)	Raw Bayer output for host-based interpolation
Gamma	Programmable LUT (Gamma 1.0 std)
Lens mount	C-mount (use 1/3" format lenses)
Power	12V DC ± 10%, 440 mA (typical at 25° C)
Operating temperature	-10° C to 50° C
Vibration	7 Grms (10 Hz to 2000 Hz) Random
Shock	70 G, 11 ms, half-sine
Dimensions (H x W x L)	51 mm x 51 mm x 84 mm
Weight	194 g (without tripod)

GUI Interface

A user-friendly graphical user interface (GUI), provided as part of the camera's extensive software development kit (SDK), allows users to control various camera functions, including:


- Shutter control for manual async. and pulse width control
- Gain control
- A/D reference voltage control
- Save settings
- Load settings
- Report settings
- LUT setting and graphic display
- Scanning mode selection and Option selections




The SDK also provides functions for controlling the grabbing of images, and configuring local I/Os, by means of an integrated API and a set of powerful C++ classes. Changes in the camera's acquisition modes automatically update the API for easy image acquisition. CPU usage is only a few percent, thanks to the TCP/IP offload engine.

Software available for download at www.jai.com

Spectral Response

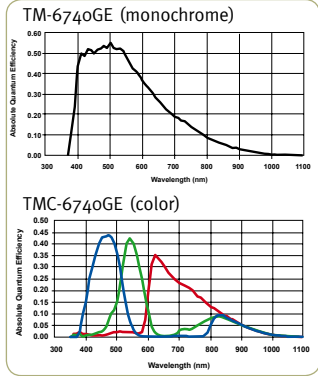

Connector Pin-out



12-Pin Connector

- | | |
|-----------------|--------------|
| 1 GND (power) | 7 VD in |
| 2 +12V | 8 Strobe out |
| 3 GND (analog) | 9 HD in |
| 4 Video out | 10 Reserved |
| 5 GND (digital) | 11 INTEG/ROI |
| 6 VINIT in | 12 Reserved |





Shutter Speed

	Manual	Async
0	1/frame rate	no shutter
1	1/250	1/64,000
2	1/500	1/32,000
3	1/1,000	1/16,000
4	1/2,000	1/8,000
5	1/4,000	1/4,000
6	1/8,000	1/2,000
7	1/16,000	1/1,000
8	1/32,000	1/500
9	1/64,000	Ext. pulse width control

Ordering Information

Camera	
Lead Processing	TM-6740GE (mono), TMC-6740GE (color)
RoHS Compliant	RM-6740GE (mono), RMC-6740GE (color)
Optional Functions	
Internal IR Cut Filter Added	OP3-1
Optical Filter Removal	OP3-2 (color only)
Ultraviolet Imager (quartz window)	OP21-QUV (monochrome only)
Optional Accessories (must be ordered separately)	
Power Cable	12P-02S
Power Supply	PD-12UUP series (includes power connector)

Dimensions



Company and product names mentioned in this datasheet are trademarks or registered trademarks of their respective owners. JAI'S cannot be held responsible for any technical or typographical errors and reserves the right to make changes to products and documentation without prior notification.

Europe, Middle East & Africa
Phone +45 4457 8888
Fax +45 4491 8880

Asia Pacific
Phone +81 45 440 0154
Fax +81 45 440 0166

Americas
Phone (Toll-Free) 1 800 445 5444
Phone +1 408 383 0300

Visit our web site on www.jai.com

See the possibilities

