

Line Scan Lens

XENON-SAPPHIRE 3.7/96, beta' = -0.29

This high-resolution, high-speed lens is optimized for the use with 16k pixel line scan sensors. It is broadband coated and can be used in the range of 400 – 1000 nm.

The V-mount makes it easy to install and rotate into the desired azimuth position for a wide range of high resolution applications.

The XENON Sapphire 3.7/96 provides three significant stop positions that are especially marked on the stop ring:

- F#3.7 is the maximum opening of the stop and provides maximum brightness. The mechanical vignetting at this F/number is only approx. 15% at the edge of the field. The MTF for 100 lp/mm is very high up to the edge of a 58 mm field. Due to the high aperture the lens is more sensitive with respect to change of magnification.
- F#4.4 shows maximum MTF and practically diffraction limited performance over the whole field. The depth of field is bigger but the lens is still sensitive to magnification changes.
- F#5.4 produces more diffraction which reduces the MTF slightly but is now extremely homogenous over the entire field. The lens shows this performance for the complete magnification range from $-0.315 < \beta' < -0.27$ and performs well for a magnification range of $-0.33 < \beta' < -0.255$ at a 16k performance of 100 lp/mm.



XENON-SAPPHIRE lens

Key Features

- for 16k line scan cameras (57.3mm length / pixel sizes 3.5µm)
- for 12k line scan cameras (62.5mm length / pixel sizes appr. 5µm)
- High resolution optics 400 - 1000 nm
- Robust mechanics for industrial environment
- Vibration insensitive
- Focus and iris setting lockable

Applications

- High-resolution 16k line scan applications
- 12k TDI inspection
- Machine Vision and other imaging applications with high throughput
- Flat panel inspection
- Quality control, etc.

Technical Specifications


XENON-SAPPHIRE 3.7/96

F/stop range	3.7 - 8
Focal length	95.5 mm
Image circle	62.5 mm
Beta'	-0.29 (-0.255 ... -0.33)
Object to image distance	539 (581 ... 503)mm
Transmission	400 -1000 nm
Interface	Schneider V-mount 70
Weight	ca. 700 gr.
Code no.	1071818

Accessories

Adapter V70 / M72 x 0.75	10 mm	Code no. # 1072419
Extension tube 5 mm		# 1072420
Extension tube 10 mm		# 1072421
Extension tube 25 mm		# 26406
Extension tube 50 mm		# 1054733

XENON-SAPPHIRE 3.7/96

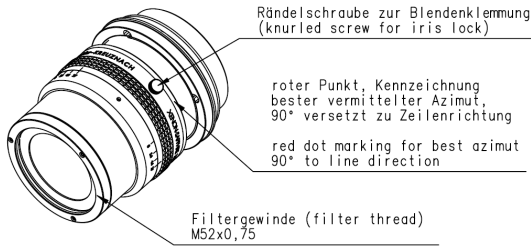

XENON SAPPHIRE 3.7/96

$f = 95,5 \text{ mm}$	$B'_P = 1,05$
$s_F = -48,02 \text{ mm}$	$s_{EP} = 43,32 \text{ mm}$
$s'_F = 53,65 \text{ mm}$	$s'_{AP} = -46,24 \text{ mm}$
$HH' = -9,28 \text{ mm}$	$\Sigma d = 80,09 \text{ mm}$


XENON SAPPHIRE 3.7/96

MODULATION with reference to the relative image height


Wavelength λ	[nm]	525	675	625	575	475	425
Spectral weighting	[%]	26.5	6.4	24.2	27.8	13.6	1.5
Spatial frequency R	[1/mm]	25	50	100			
Image- \emptyset f / 3.7	[mm]	62.0					
Image- \emptyset f / 5.4	[mm]	62.0					

radial —
tangential - -


$B' = -0.29$

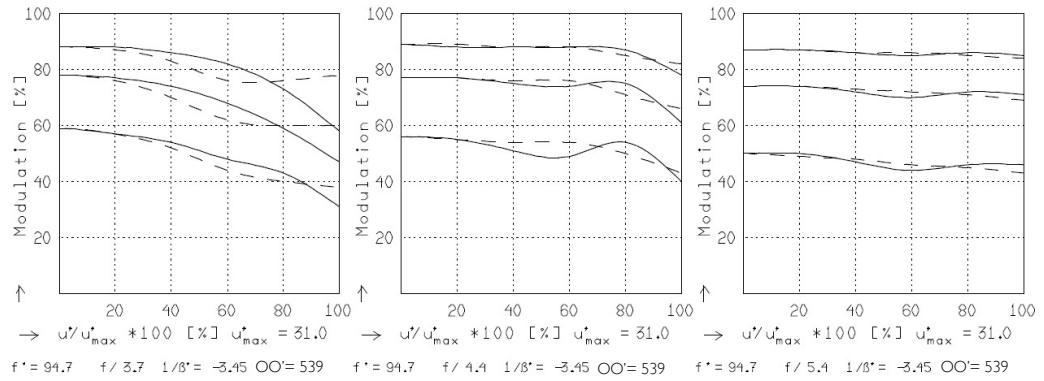

$B' = -0.27$

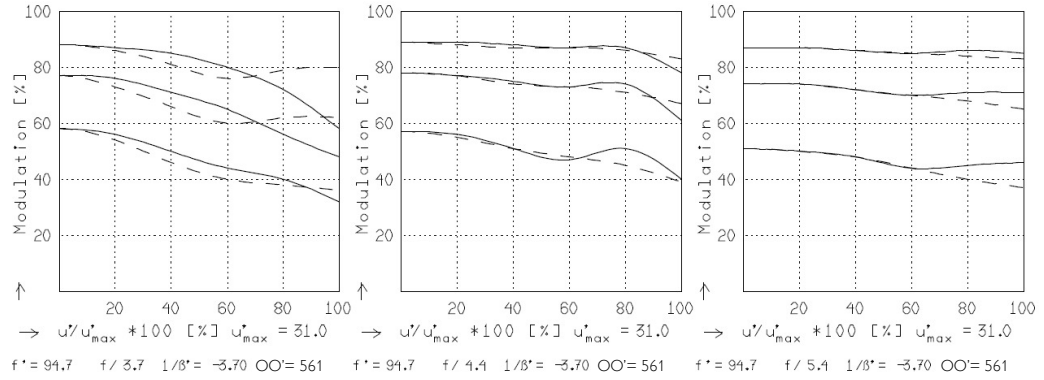

$B' = -0.315$

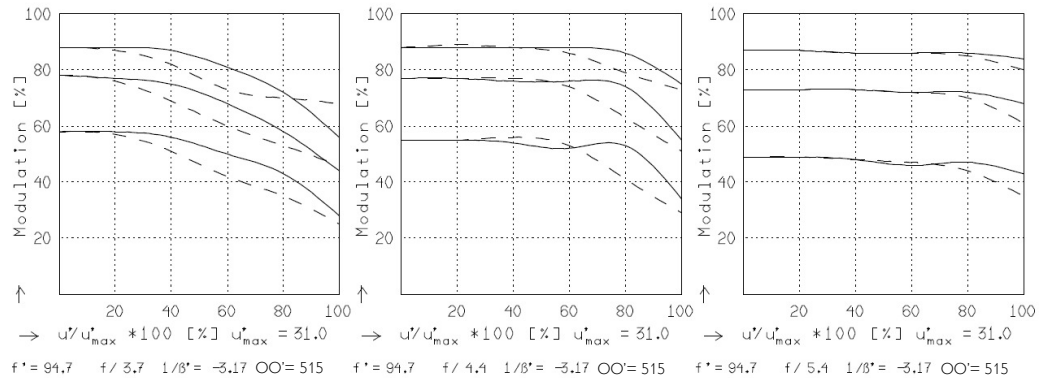

Focusing : MTF_{max} at $f / 4.4$, $R = 50$ 1/mm. $u'/u'_{max} = 0$

Contact

Jos. Schneider Optische Werke GmbH
Ringstraße 132
55543 Bad Kreuznach
Germany
Phone +49 671 601-521
Fax +49 671 601-286
www.schneiderkreuznach.com/industrialoptics
industrie@schneiderkreuznach.com

Schneider Asia Pacific Ltd.
20/F Central Tower, 28 Queen's Road
Central, Hong Kong
China
Phone +852 8302 0301
Fax +852 8302 4722
www.schneider-asiapacific.com
info@schneider-asiapacific.com

Schneider Optics Inc.
285 Oser Ave.
Hauppauge, NY 11788
USA
Phone +1 631 761-5000
Fax +1 631 761-5090
www.schneideroptics.com/industrial
industrial@schneideroptics.com